



基本型號		主要寸法(mm)				基本定格荷重(kgf)		極限速率(rpm)	
圓形內孔	錐形內孔	d	D	B	r	C	CO	脂潤滑	油潤滑
135		5	19	6	0.5	203	56	30000	36000
126		6	19	6	0.5	203	56	30000	36000
127		7	22	7	0.5	215	73	27000	33000
108		8	22	7	0.5	216	74	27000	33000
129		9	26	8	1	320	105	25000	31000
1200		10	30	9	1	435	136	22000	28000
2200			30	14	1	530	153	22000	28000
1300			35	11	1	580	190	20000	24000
2300			35	17	1	735	223	18000	22000
1201		12	32	10	1	470	150	20000	26000
2201			32	14	1	600	196	20000	25000
1301			37	12	1.5	775	241	18000	22000
2301			37	17	1.5	915	290	16000	20000
1202		15	35	11	1	600	205	18000	22000
2202			35	14	1	600	219	18000	22000
1302			42	13	1.5	815	268	16000	20000
2302			42	17	1.5	940	330	14000	17000

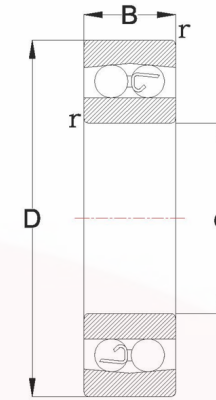


圓筒內孔

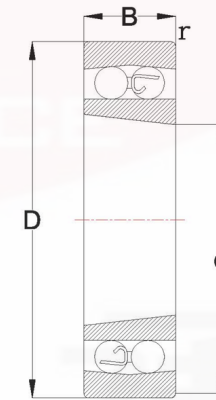


錐形內孔

基本型號		主要寸法(mm)				基本定格荷重(kgf)		極限速率(rpm)	
圓形內孔	錐形內孔	d	D	B	r	C	CO	脂潤滑	油潤滑
1203		17	40	12	1	635	247	16000	19000
2203			40	16	1	790	280	16000	19000
1303			47	14	1.5	970	375	14000	17000
2303			47	19	1.5	1160	405	13000	16000
1204	1204K	20	47	14	1.5	790	325	13000	16000
2204	2204K		47	18	1.5	980	395	13000	16000
1304	1304K		52	15	2	970	410	13000	15000
2304	2304K		52	21	2	1460	540	11000	14000
1205	1205K	25	52	15	1.5	945	410	12000	14000
2205	2205K		52	18	1.5	980	435	12000	14000
1305	1305K		62	17	2	1430	610	10000	13000
2305	2305K		62	24	2	1950	760	9000	11000
1206	1206K	30	62	16	1.5	1220	590	10000	12000
2206	2206K		62	20	1.5	1220	580	10000	12000
1306	1306K		72	19	2	1690	790	9000	11000
2306	2306K		72	27	2	2500	1020	8000	10000

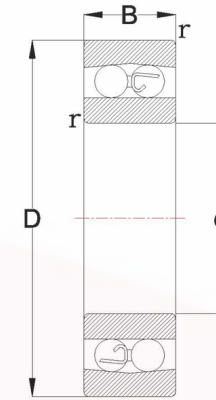


圓筒內孔

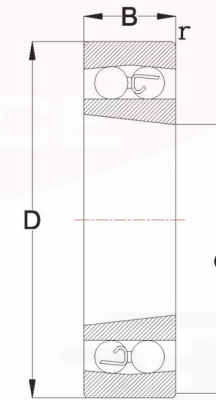


錐形內孔

基本型號		主要寸法(mm)				基本定格荷重(kgf)		極限速率(rpm)	
圓形內孔	錐形內孔	d	D	B	r	C	CO	脂潤滑	油潤滑
1207	1207K	35	72	17	2	1250	675	8500	10000
2207	2207K		72	23	2	1710	840	8500	10000
1307	1307K		80	21	2.5	1990	1000	8000	9500
2307	2307K		80	31	2.5	3100	1300	7100	8500
1208	1208K	40	80	18	2	1520	870	7500	9000
2208	2208K		80	23	2	1770	965	7500	9000
1308	1308K		90	23	2.5	2350	1240	7000	8500
2308	2308K		90	33	2.5	3500	1600	6300	7500
1209	1209K	45	85	19	2	1700	960	7100	8500
2209	2209K		85	23	2	1840	1090	7100	8500
1309	1309K		100	25	2.5	2990	1620	6300	7500
2309	2309K		100	36	2.5	4350	1980	5600	7000
1210	1210K	50	90	20	2	1740	1100	6300	8000
2210	2210K		90	23	2	1840	1150	6300	8000
1310	1310K		110	27	3	3450	1780	5600	7100
2310	2310K		110	40	3	5150	2390	5000	6300

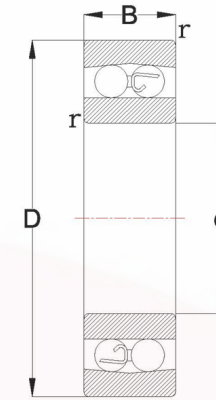


圓筒內孔

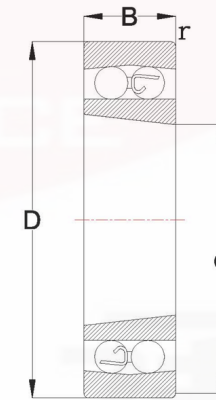


錐形內孔

基本型號		主要寸法(mm)				基本定格荷重(kgf)		極限速率(rpm)	
圓形內孔	錐形內孔	d	D	B	r	C	CO	脂潤滑	油潤滑
1211	1211K	55	100	21	2.5	2110	1360	6000	7100
2211	2211K		100	25	2.5	2100	1350	6000	7100
1311	1311K		120	29	3	4050	2290	5000	6300
2311	2311K		120	43	3	6000	2850	4500	5600
1212	1212K	60	110	22	2.5	2400	1580	5300	6700
2212	2212K		110	28	2.5	2660	1710	5300	6700
1312	1312K		130	31	3.5	4550	2710	4800	5600
2312	2312K		130	46	3.5	6950	3350	4300	5300
1213	1213K	65	120	23	2.5	2400	1750	4800	6000
2213	2213K		120	31	2.5	3400	2190	4800	6000
1313	1313K		140	33	3.5	4900	2990	4300	5300
2313	2313K		140	48	3.5	6950	3650	4000	4800
1214		70	125	24	2.5	2730	1910	4500	5600
2214			125	31	2.5	3450	2320	4500	5600
1314			150	35	3.5	5850	3600	4000	5000
2314			150	51	3.5	7000	3900	3600	4500

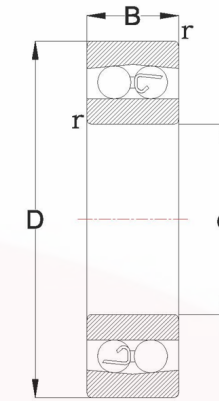


圓筒內孔

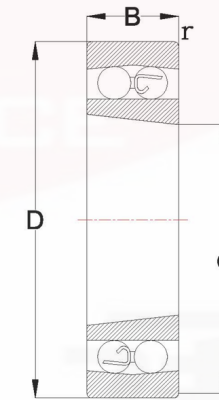


錐形內孔

基本型號		主要寸法(mm)				基本定格荷重(kgf)		極限速率(rpm)	
圓形內孔	錐形內孔	d	D	B	r	C	CO	脂潤滑	油潤滑
1215	1215K	75	130	25	2.5	3150	2180	4300	5400
2215	2215K		130	31	2.5	3500	2440	4300	5300
1315	1315K		160	37	3.5	6250	3900	3800	4500
2315	2315K		160	55	3.5	8050	4550	3400	4300
1216	1216K	80	140	26	3	3150	2400	4000	5000
2216	2216K		140	33	3	3850	2740	4000	5000
1316	1316K		170	39	3.5	6900	4300	3600	4300
2316	2316K		170	58	3.5	9150	5200	3200	4000
1217	1217K	85	150	28	3	3900	2900	3800	4800
2217	2217K		150	36	3	4600	3200	3800	4800
1317	1317K		180	41	4	7750	4950	3400	4000
2317	2317K		180	60	4	9750	5500	3000	3800
1218	1218K	90	160	30	3	4550	3250	3600	4400
2218	2218K		160	40	3	5150	3650	3600	4300
1318	1318K		190	43	4	9200	5700	3200	3800
2318	2318K		190	64	4	9850	5900	2800	3600

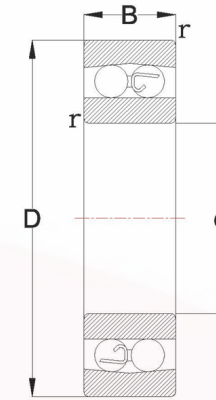


圓筒內孔

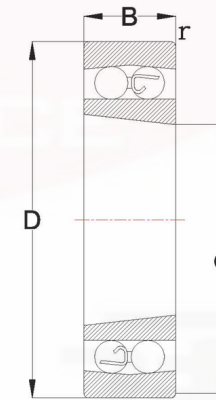


錐形內孔

基本型號		主要寸法(mm)				基本定格荷重(kgf)		極限速率(rpm)	
圓形內孔	錐形內孔	d	D	B	r	C	CO	脂潤滑	油潤滑
1219	1219K	95	170	32	3.5	5000	3750	3400	4100
2219	2219K		170	43	3.5	5750	4000	3400	4000
1319	1319K		200	45	4	10400	6500	3000	3600
2319	2319K		200	67	4	11600	7000	2600	3400
1220	1220K	100	180	34	3.5	5450	4100	3200	3900
2220	2220K		180	46	3.5	6150	4350	3200	3800
1320	1320K		215	47	4	10300	7350	2800	3400
2320	2320K		215	73	4	11700	7500	2400	3200
1221		105	190	36	3.5	5850	4500	3000	3700
2221			190	50	3.5	7650	5300	3000	3600
1321			225	49	4	11800	7700	2600	3200
2321			225	77	4	12600	8350	2400	3000
1222	1222K	110	200	38	3.5	6350	4900	2800	3400
2222	2222K		200	53	3.5	7750	5600	2800	3400
1322	1322K		240	50	4	12000	8250	2600	3000
2322	2322K		240	80	4	13600	9250	2200	2800

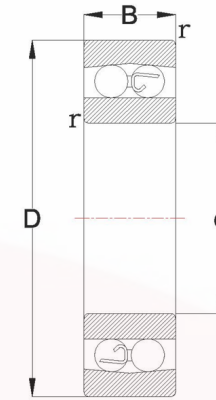

圓筒內孔

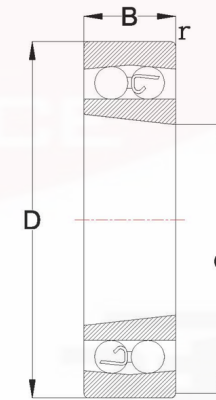

錐形內孔